



Phone (toll-free): (888) 380-9660
Phone (local): (973) 340-9955
Fax: (973) 340-9933
Web: www.straval.com

20 Bushes Lane
Elmwood Park, NJ 07407

Model BPS05-150 FLG-EX

150# Flange Back Pressure/Bypass Valve



- Hastelloy C276, Monel, Titanium, Alloy 20 (You can find the Stainless Steel model here)
- 1/2"-4" flanged (see also our Exotic Alloy threaded NPT model BPS-05)
- Adjustable control pressures from 30 PSI (2 Bar) to 275 PSI (19 Bar) at 100 °F (38 °C)

Features

- **Body:** Hastelloy C276, Monel, Titanium, Alloy 20
- **Poppet:** Available in the same materials as the body. Metal and soft seats available for gas and liquid service. See pricing pages.
- **Poppet seal:** Choice of different elastomers including Teflon and kalrez expands valve usage to a wide range of applications and fluids. Choice of elastomer determines final temperature limitation.
- **Spring chamber:** Because it is non-wetted, the standard construction is stainless steel, but can be upgraded to the same alloys above in aggressive environments.
- **Right-angle porting:** Standard construction is bottom inlet, side outlet. Also available with sanitary flanges for low pressures.

Applications

Use this regulating valve for back pressure control applications such as maintaining constant pump discharge pressures, bypassing excessive pressures from various types of process equipment, and wherever a constant pressure must be maintained in a process or piping system. Valve should only be used selectively where the materials chosen are compatible with the fluid used and will not cause corrosive buildup or crystallization in the close clearances between the piston and body bore, which could keep the poppet from opening freely. Use only clean, strained (at least a #20 mesh), or filtered liquids or gases so that the valve can operate without buildup of debris or solid matter which can cause the valve to malfunction. A Exotic Alloy strainer or filter with the appropriate perf or mesh and pressure rating can be purchased from Straval.

This particular model should only be applied where the outlet pressure is relatively low, near atmospheric pressure, except for normal piping losses. Where the outlet pressures in the discharge piping are elevated and stay elevated, reseating of the valve will take place at a much lower pressure than the original set pressure. The valve will reseat itself to its original set pressure once the outlet pressure is reduced to its original value when the valve was set. If this behavior is not acceptable, select the balanced piston model or contact Straval for one that is designed to compensate for high continuous outlet pressures. This version will cost slightly more than the standard model.

Although the valve is typically installed in the position illustrated, it can operate in any position or orientation, vertical horizontal, etc as long as it can be easily accessed for making adjustments.

These valves do not have carry the Canadian CRN or ASME approval stamp and should not be applied where this requirement must be met. However, the valves generally meet or exceed ASME design criteria with wall thicknesses that are much heavier than the minimums required. For an additional charge, valves can be ordered with material certs and with a certified hydro-test certificate and other tests to meet special documentation and acceptance requirements.

Standard metal seated valves meet ANSI/FCI Class IV seat leakage standards (0.01% of rated valve capacity, not bubble tight).

Options

Scroll down below to select the valve size, spring range, material options in the customized pricing and ordering section indicated by the red arrows. You have the ability to customize your valve choices by selecting the wetted and nonwetted materials, and choice of seat materials to suit your shutoff requirements, using the softer seats for improved shutoff, particularly for air or gas applications where they are available at the lower pressures. Once these selections are made a price quote can be generated and printed directly to your computer or immediately e-mailed to you.

When ordering don't forget to state your desired relief set pressure if you expect the valve to relieve at only one pressure. This pressure will be engraved on the valve body. **If the set pressure is not specified, the valve will be set at or below the stated spring range as selected for the order and no set pressure will be stamped on the nameplate.**


Principle of Operation

This is a direct-operated poppet and spring type back pressure/bypass valve where the spring constantly opposes the pressure acting against the poppet which seals off the inlet port from the outlet port at the valve seat. The desired set pressure or relief is achieved by compressing the spring until the spring force is adequate to balance the pressure force acting against the poppet. When the inlet pressure exceeds the set pressure, the poppet will open to relieve the excess pressure. The valve will operate in

a vertical orientation as illustrated, horizontal, or any other orientation. This valve can also be operated by remote pressure adjustment which can be achieved with a dome type air-loaded version. Consult factory.

These valves are not equipped with a manual lever release. However, manual override is accomplished by first locking the spring lock nut to the adjusting screw and backing it out enough to open the poppet to release pressure, and then repositioning it to its original preset locked condition without losing the original set pressure. This procedure is recommended periodically to flush the seat and to check for proper opening of the valve piston.

Hastelloy C276, Monel, Titanium, Alloy 20

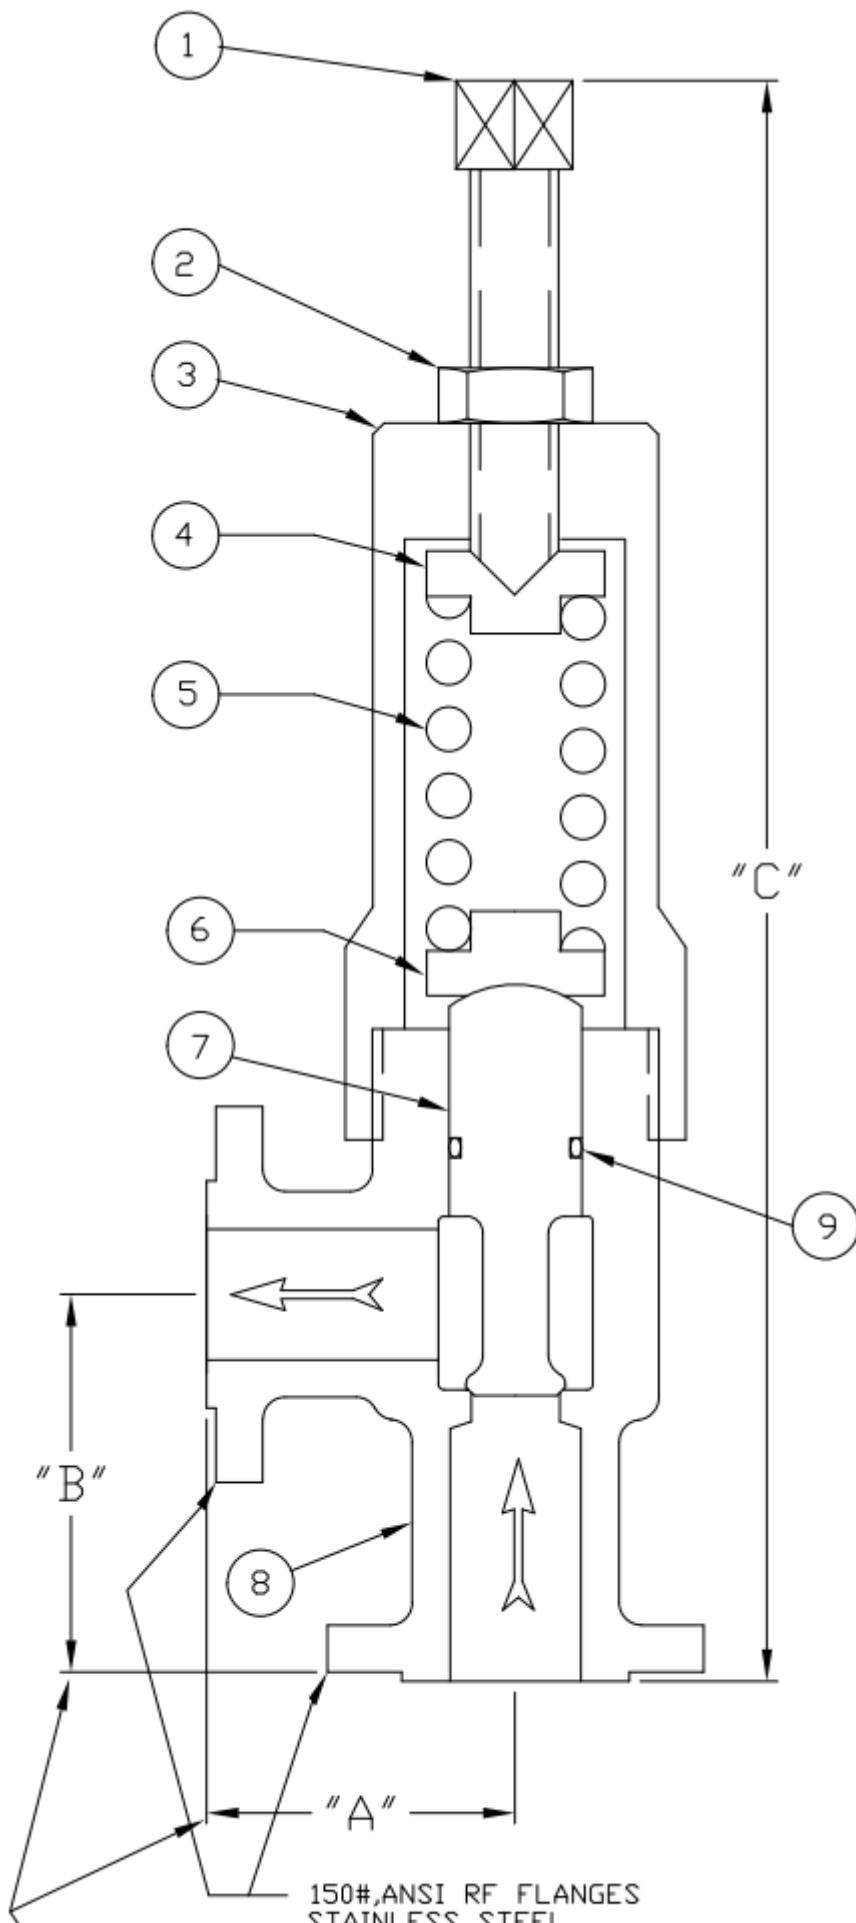

MATERIAL LIST & SPECIFICATION

| | |
|---|------------------|
| 1 | ADJUSTING SCREW |
| 2 | LOCK NUT |
| 3 | SPRING CHAMBER |
| 4 | SPRING PUSHER |
| 5 | ADJUSTING SPRING |
| 6 | SPRING CARRIER |
| 7 | POPPET |
| 8 | BODY |
| 9 | SEAL |

*

DIMENSIONS

| SIZE | "A" (IN) | "B" (IN) | "C" (IN) |
|-------|-------------|-------------|-------------|
| 1/2 | 2 1/2 | 2 1/2 | 8 7/8 |
| 3/4 | 2 3/4 | 2 3/4 | 9 3/4 |
| 1 | 2 3/4 | 3 | 11 1/8 |
| 1 1/4 | 3 | 3 1/2 | 12 1/4 |
| 1 1/2 | 3 | 4 | 13 1/2 |
| 2 | 3 1/2 | 4 1/2 | 15 1/2 |
| 2 1/2 | 4 | 5 | 18 1/2 |
| 3 | 5 | 5 1/2 | 21 |
| 4 | 6 | 6 | 23 |

NOTE: UPGRADE TO ALL STAINLESS STEEL IS OPTIONAL FOR ALL NON-WETTED PARTS

* ALTERNATE ELASTOMERS AVAIL.
BUNA, EPDM, TEFILON, KALREZ

PH 973-340-9955
FX 973-340-9933
21 COLUMBUS AVE
GARFIELD, NJ, 07026

STRAYLERS VAL

| | |
|--------------------------|-------------------------------------------------------------------|
| MATL SEE ABOVE | TITLE RELIEF VALVE ST. STEEL 1/2"-4" MODEL BPS05-FLG |
| SCALE NONE | |
| DATE 9-5-06 | DWG NO |
| DRWN EDS | BPS05-150#FLG |

Material List and Specification

| # | Item | Materials |
|----|------------------|---------------------------------|
| 1. | Adjusting screw | Steel |
| 2. | Lock nut | Steel |
| 3. | Spring chamber | Steel |
| 4. | Spring pusher | Steel |
| 5. | Adjusting spring | Steel |
| 6. | Spring Carrier | Steel |
| 7. | Poppet | Stainless steel |
| 8. | Body | Stainless steel |
| 9. | Seal | Viton, Buna, EPDM, Teflon, etc. |

- Upgrade to all stainless steel is optional for all non-wetted parts

Dimensions (inches) These apply to 150# flanges. Request drawing for higher flange ratings

| Size | A (in) | B (in) | C (in) |
|-------|--------|--------|--------|
| 1/2 | 2-1/2 | 2-1/2 | 8-7/8 |
| 3/4 | 2-3/4 | 2-3/4 | 9-3/4 |
| 1 | 3-1/2 | 3-1/2 | 11-1/8 |
| 1-1/4 | 3-3/4 | 3-3/4 | 12-1/4 |
| 1-1/2 | 4 | 4 | 13-1/2 |
| 2 | 4 1/2 | 4-1/2 | 15-1/2 |
| 2 1/2 | 5 | 5 | 18-1/2 |
| 3 | 5-1/2 | 5-1/2 | 21 |
| 4 | 6 | 6 | 23 max |

Note: Dimensions are approximate and are subject to change without notice. Request certified dimensions before final product installation.

1/2" BPS05-05A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Std Unbal Design)

Multiple Spring Ranges from:15-250 psig (1.03-17.2 barg) Select spring from pricing page

3/4" BPS05-07A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)

Multiple Spring Ranges from:15-250 psig (1.03-17.2 barg) Select spring from pricing page

1" BPS05-10A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)

Multiple Spring Ranges from:10-250 psig (0.69-17.2 barg) Select spring from pricing page

1-1/4" BPS05-12A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)

Multiple Spring Ranges from:10-250 psig (0.69-17.2 barg) Select spring from pricing page

1 1/2" BPS05-15A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)
Multiple Spring Ranges from:15-250 psig (1.03-17.2 barg) Select spring from pricing page

2" BPS05-20A-EX

150 psi ANSI Flange (275 psi max) (~19 bar max) Rating (Balanced Design)
Multiple Spring Ranges from:15-250 psig (1.03-17.2 barg) Select spring from pricing page

2 1/2" BPS05-25A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)
Multiple Spring Ranges from:15-250 psig (1.03-17.2 barg) Select spring from pricing page

3" BPS05-30A-EX

150 psi ANSI Flange (275 psi max) (19 bar max) Rating (Balanced Design)
Multiple Spring Ranges from:10-270 psig (0.69-18.6 barg) Select spring from pricing page

4" BPS05-40A-EX

**150 psi ANSI B16.5 RF Flange (275 psi max) (19 bar max) Rating
(std 8 hole pattern) Balanced Design**
Multiple Spring Ranges from:15-270 psig (1.03-18.6 barg) Select spring from pricing page

The spring ranges listed above are not achievable with one spring, but are compressed to show overall product capability.
Select a specific spring range in the pricing pages or specify a set pressure when ordering.