

Phone (toll-free): (888) 380-9660 Phone (local): (973) 340-9955 Fax: (973) 340-9933 Web: www.straval.com

20 Bushes Lane Elmwood Park, NJ 07407

Model SBS10-150-FLG

Stainless Steel Simplex Basket Strainer



- Stainless steel or Steel (Hastelloy, Monel, Titanium, Alloy20 model is located here)
- 1/2"-3" with 150#, 300#, 600# ANSI Flanges)
- Stainless Steel perf or mesh
- Pressures to 275 PSI (19 Bar) (ANSI 150#, RF Flanged)

Features

- Body: Standard materials are Stainless Steel or Carbon Steel
- Heavy-duty basket constructed of stainless steel perf and additional wire mesh when requested.

- Perf: Available from .020" to 3/16" openings (stainless steel only).
 Mesh: As small as .001" openings. 25 micron (#500 mesh) material available in 304 & 316 stainless steel.
 Seal: Standard seals are Buna and Viton O-ring. Other elastomers and seal types are available for higher temperatures and pressures.
- Parallel ports: ANSI flanges with various pressure ratings are also available. Bottom through flow port is available, but must be quoted.

Applications

This heavy-duty strainer can be used for liquids, steam, and gases for operating pressures up to 275 PSI. It is used to protect various pipeline components such as pressure-reducing valves, relief valves, etc. that require clean, filtered, or strained liquids to keep these devices operational. The strainer basket element is constructed of a heavy duty stainless perf element with opening sizes from .020" up to 3/16", and when required, an additional stainless steel wire mesh can be added to screen out fine particles down to .001". Note that the overall length is not specified on the illustration as this is determined once the net open percent area is calculated from the perf or wire mesh size.


Special alloys such as Monel or Hastelloy can also be used in the manufacture of this strainer for very aggressive services. Click here to order a **Monel, Hastelloy, Alloy 20 or Titanium basket strainer**.

Since this type of construction is usually suited for high-pressure service, the cover is a threaded plug type design which can be easily removed with an adjustable or pipe wrench. Where a quick-opening type cover is required for lower pressures to 150 PSI, this **stainless steel basket strainer** is available with a quick-opening stainless steel V-band clamp. This model is available only in stainless steel.

When requested an optional pressure gauge or drain connection can be provided for the SBS-10 strainer model.

Options

See pricing pages for ordering various material options, including an optional vent or gauge port and drain. Instead of the standard side outlet, a bottom outlet is also available, but requires a special body and must be quoted.

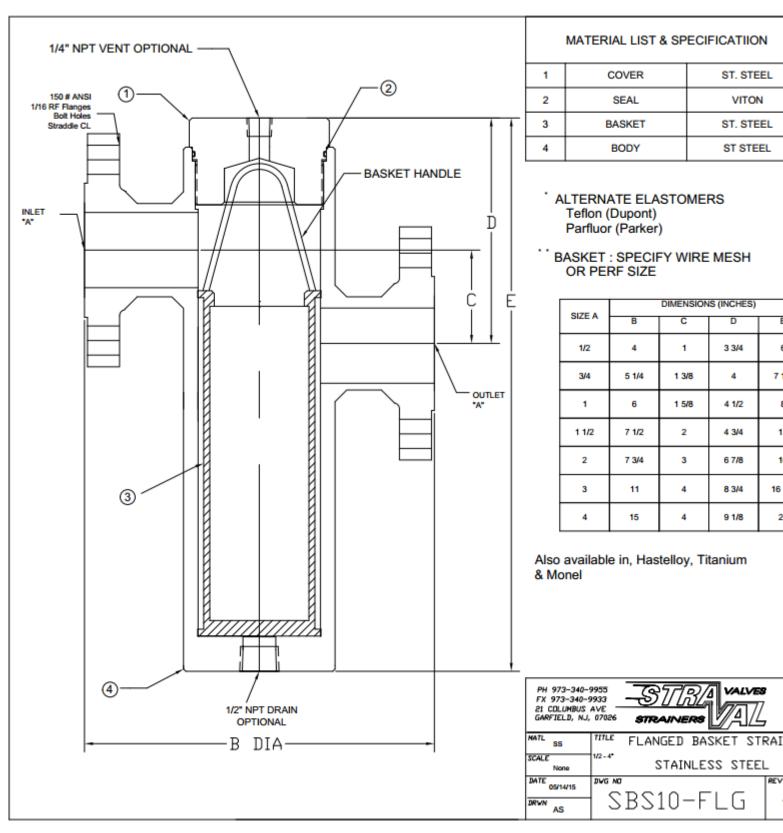

SBS-10-FLG

Material List and Specification

| # Item | | Materials | | |
|--------|-----------------|---------------------------|--|--|
| 1. | *Cover | Steel or Stainless steel | | |
| 2. | † Seal | Buna, Viton, Epdm or PTFE | | |
| 3. | ‡ Basket | Stainless steel | | |
| 4. | * Body | Steel or Stainless steel | | |

Notes

* Alternate materials: carbon steel, Monel, Hastelloy

Alternate elastomers: Buna, EPDM, Teflon, Parfluor, Kalrez
 Basket: Specify wire mesh or perf size

Dimension "E" to suit specific application. Specify net open basket area or volumetric basket capacity.

| Dimensions | | | | | |
|--------------|-------|-------|-------|--|--|
| Size A (NPT) | В | С | D | | |
| 1/2 | 3 | 1-1/4 | 3 1/2 | | |
| 3/4 | 3 | 1-1/4 | 3-1/2 | | |
| 1 | 4 | 1-3/4 | 4-3/4 | | |
| 1-1/4 | 4-1/2 | 1-3/4 | 5-1/4 | | |
| 1-1/2 | 4-1/2 | 1-1/4 | 5-1/2 | | |
| 2 | 6 | 2-1/2 | 6-1/4 | | |

Note: Dimensions are approximate and are subject to change without notice. Request certified dimensions before final product installation.

1/2" SBS10-05A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

3/4" SBS10-07A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

1" SBS10-10A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

1 1/2" SBS10-15A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

2" SBS10-20A

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

3" SBS10-30A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

4" SBS10-40A

Strainers with Perf Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.062-0.125 in (1.575-3.175 mm)

Strainers with Mesh Baskets: Body 275 psig Rating (ANSI 150#, RF Flanged) Particle sizes from:0.001-0.045 in (0.0254-1.143 mm)

Select a specific particle size in the pricing pages from either the Perf or Mesh groups.